

DUCHESNE COUNTY MONUMENT SURVEY RECORD



T4S R8W

1/4

SEC 23 | SEC 24

U.S.B.&M.


L-21



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 85°33'59" E	60.13'
L2	N 30°05'56" E	37.15'
L3	N 54°25'54" W	25.75'
L4	S 08°20'24" E	18.19'

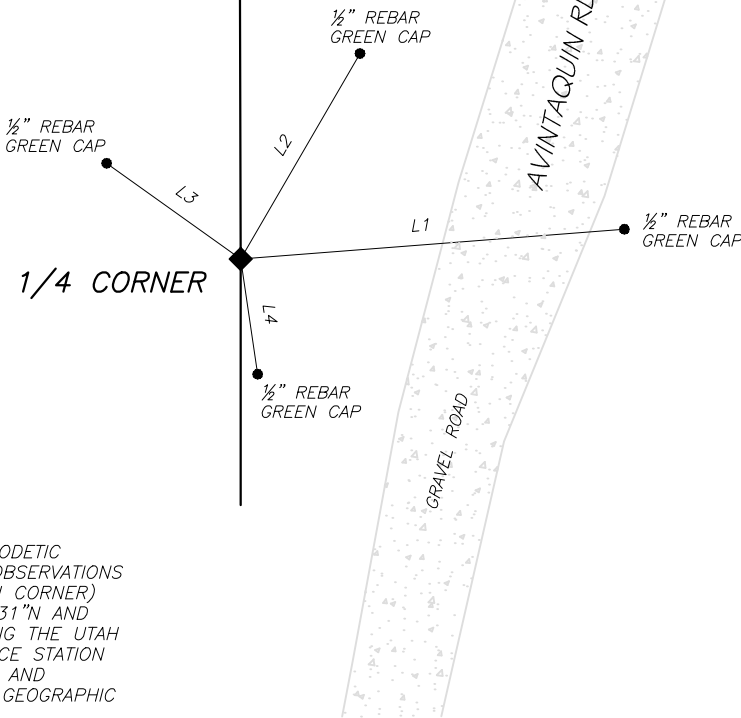

NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S. OBSERVATIONS
AT A CONTROL POINT (SECTION CORNER)
LOCATED AT LAT. 40°09'16.01931"N AND
LONG. 110°45'51.61780"W USING THE UTAH
STATE G.P.S. VIRTUAL REFERENCE STATION
CONTROL NETWORK MAINTAINED AND
OPERATED BY THE AUTOMATED GEOGRAPHIC
REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A GALVANIZED PIPE MONUMENT AT
POSITION OF 1/4 CORNER



MARKING ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

SET FOUR 1/2" REBAR WITH GREEN PLASTIC
CAPS MARKED "REFERENCE MARKER" AS
REFERENCE POINTS AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7212770.633
E: 1851461.159
NAVD88 EL: 6091.54'

LATITUDE: 40°07'06.52402" N
LONGITUDE: 110°44'43.17483" W
ELLIPSOID HEIGHT: 6038.00'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300040S0080W0_600340



PHOTO OF MONUMENT FACING SOUTH

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 17 MAY '19

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

